


Technical Data Sheet

MUTOH's Infra Red Dryer

Optional Infra Red Dryer for Large-format Inkjet Printers

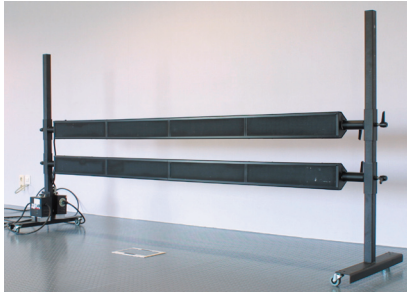

When using a take-up system in combination with slow drying media, applying a lot of ink and/or printing at high speed, Mutoh's Infra Red Dryer will immediately dry your printed media before it is being rolled up.

The infra red heating element will dry the output uniformly across the entire surface, without air circulation. Ink will dry faster without losing colour gamut, improving productivity.

Mutoh's Infra Red Dryer is available in a width of 72 inch (1835 mm) (maximum 5.2 A), 90 inch (2286 mm) (maximum 7.1 A) or 108 inch (2750 mm) (maximum 8.2 A). The system consists of a stand with casters onto which a heating element is mounted. Brackets secure the distance between the heater and the media. For high-speed production printers, mounting of a second heater onto the stand is made possible. If necessary, the stand can be tilted (7.6°) to ensure that both heaters are at the same distance towards the media.

Recommended Configuration for Mutoh Printers

	Stand	Heater Element(s)
Rockhopper 48"		1
Rockhopper 62"		1
Mutoh's Rockhopper 3 65"		1
Mutoh's Rockhopper 3 90"		2
Viper TX Direct Textile Printer 65"	*	1
Viper TX Direct Textile Printer 90"	*	1
Mutoh's Osprey 75"	*	2
Mutoh's Osprey 102"	*	2

(*): Tilting the stand is recommended.




Rockhopper



Rockhopper 3



Viper TX

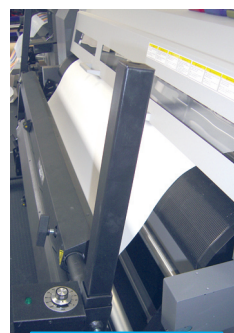

Osprey